

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -




ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

| P | LTR | DESCRIPTION   | DATE      | DWN | APVD |
|---|-----|---------------|-----------|-----|------|
|   | A   | ECR-12-012496 | 11JUL2012 | JvH | DH   |
|   | B   | ECR-12-014942 | 22AUG2012 | WJ  | DH   |
|   | B1  | ECR-12-015266 | 28AUG2012 | WJ  | DH   |
|   | B2  | ECR-13-013765 | 30AUG2013 | JvH | DH   |

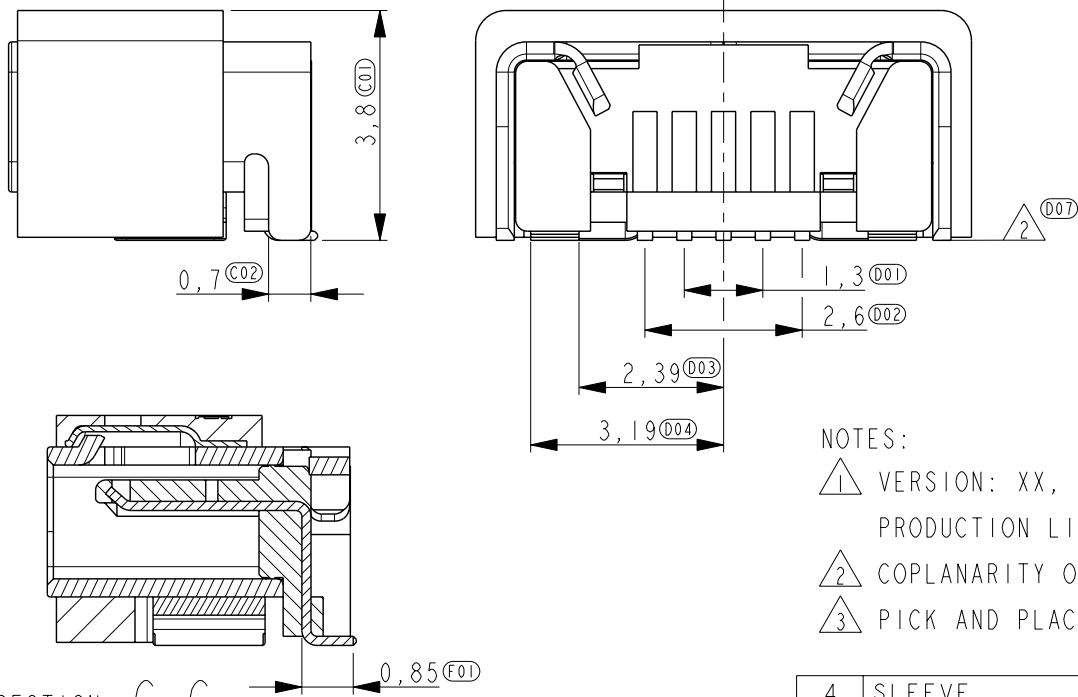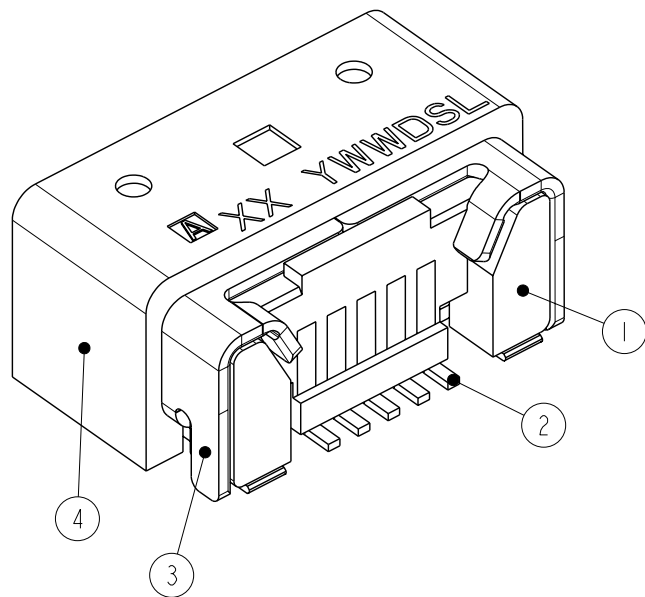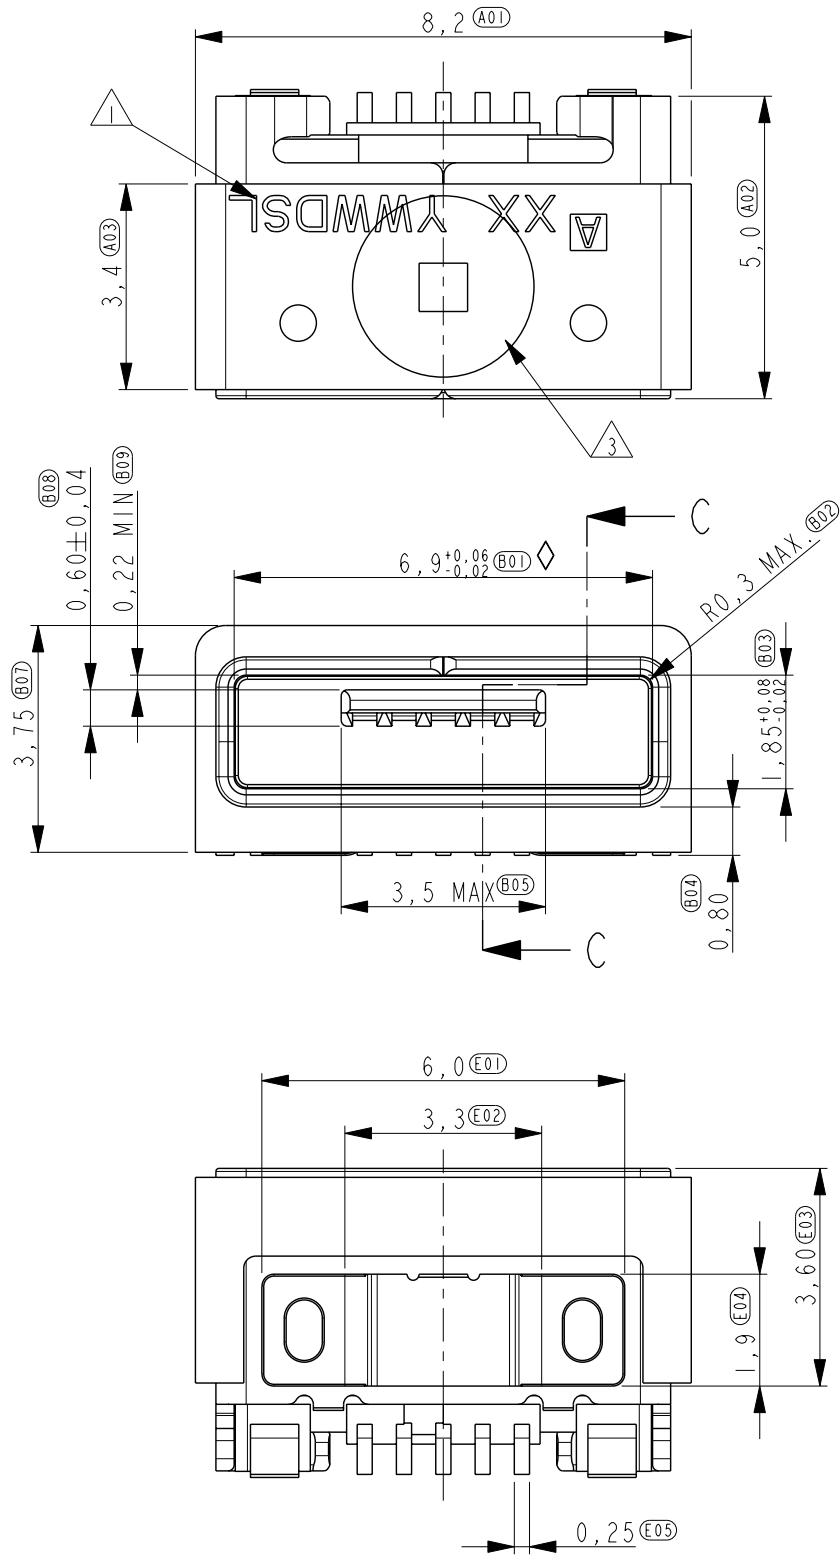

SECTION C-C

TE PN: 1551629-2

TE PN FOR LOW MOQ: 1551629-3


NOTES:

1 VERSION: XX, PRODUCTION DATE: YYWW, SHIFT CODE: S, PRODUCTION LINE NO: L.





2 COPLANARITY OF 11 SOLDER SURFACES 0,08 MAX.

3 PICK AND PLACE AREA Ø3


| 4        | SLEEVE      | LCP             |                          |
|----------|-------------|-----------------|--------------------------|
| 3        | SHELL       | STAINLESS STEEL | Tin over Nickel plating  |
| 2        | CONTACT     | COPPER ALLOY    | Gold over Nickel plating |
| 1        | HOUSING     | LCP             |                          |
| ITEM NO. | DESCRIPTION | MATERIAL        | FINISH                   |

|                        |           |   |  |              |                    |                         |                    |
|------------------------|-----------|---|--|--------------|--------------------|-------------------------|--------------------|
| DWN<br>W. Jansen       | 04APR2010 |  TE Connectivity |  |              |                    |                         |                    |
| CHK<br>W. Jansen       | 04APR2010 |   |  |              |                    |                         |                    |
| APVD<br>D. Halberstadt | 04APR2010 | NAME<br>SPLASH-PROOF MICRO USB<br>AB-TYPE<br>0,8 mm OFFSET  |  |              |                    |                         |                    |
| PRODUCT SPEC<br>-      |           |   |  |              |                    |                         |                    |
| APPLICATION SPEC<br>-  |           | SIZE<br>A3  |  |              | CAGE CODE<br>00779 | DRAWING NO<br>C-1551629 | RESTRICTED TO<br>- |
| WEIGHT<br>0,33 gr      |           |   |  |              |                    |                         |                    |
| Customer Drawing       |           |   |  | SCALE<br>8:1 | SHEET<br>1         | OF<br>3                 | REV<br>B2          |

| 2   |      | 1         |     |             |      |     |
|-----|------|-----------|-----|-------------|------|-----|
| LOC | DIST | REVISIONS |     |             |      |     |
| -   | -    | P         | LTR | DESCRIPTION | DATE | DWN |
|     |      | -         |     | SEE SHEET 1 | -    | -   |
|     |      |           |     |             |      |     |
|     |      |           |     |             |      |     |
|     |      |           |     |             |      |     |

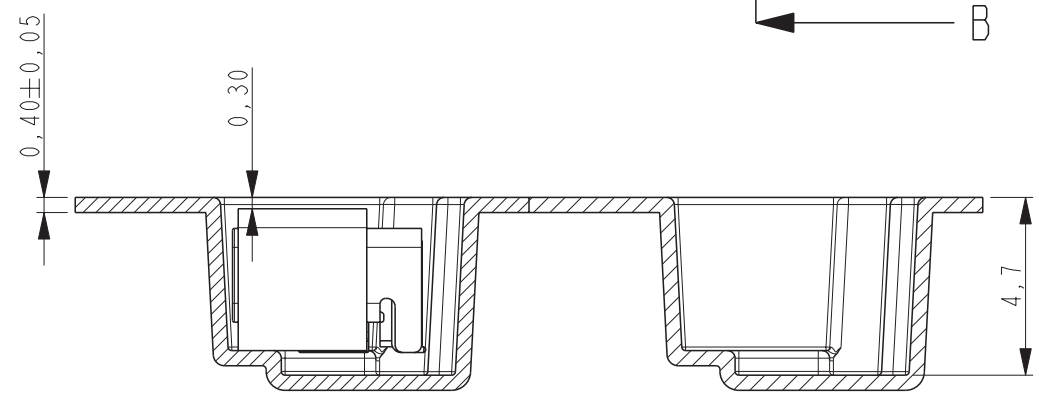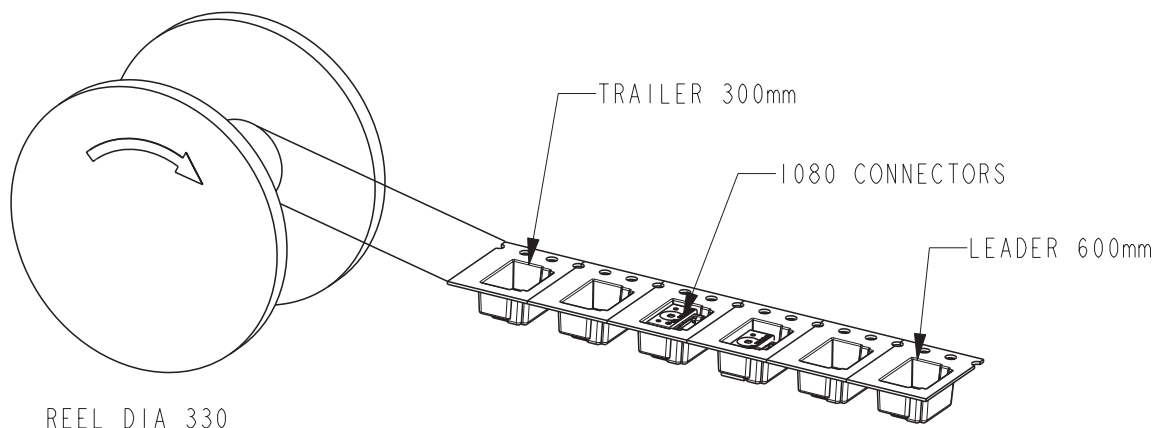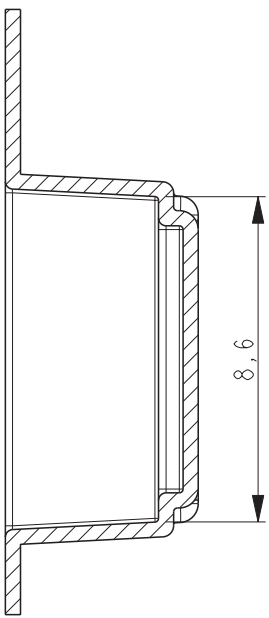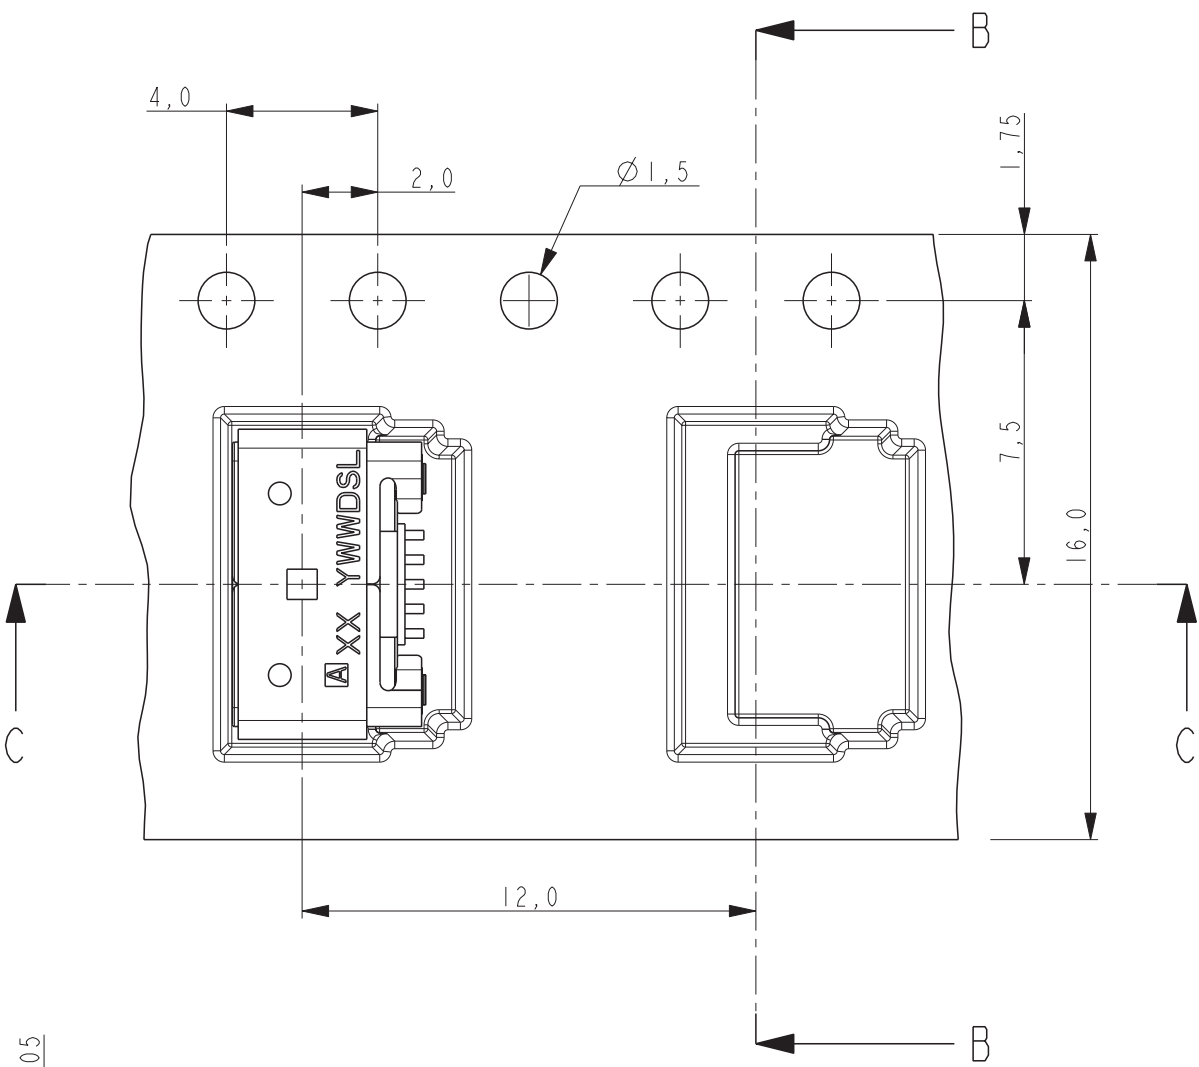

NOTES:  
COVER, EMOSS TAPE AND REEL ACCODING EIA STANDARD 481-D

|  |  |                        |              |   |  |           |
|--|--|------------------------|--------------|---|--|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN<br>W. Jansen       | 04APR2010    |  TE Connectivity |  |           |
|  |  | CHK<br>W. Jansen       | 04APR2010    |   |  |           |
|  |  | APVD<br>D. Halberstadt | 04APR2010    | NAME<br>SPLASH-PROOF MICRO USB<br>AB-TYPE<br>0,8 mm OFFSET  |  |           |
|  |  | PRODUCT SPEC           | -            |   |  |           |
|  |  | APPLICATION SPEC       | -            | SIZE<br>A3  |  |           |
|  |  | WEIGHT                 | 0,33 gr      |   |  |           |
|  |  | Customer Drawing       | SCALE<br>8:1 | SHEET<br>2 OF 3   |  | REV<br>B2 |

